




Function/application

- Multi-channel transmitter 24 Channel 868 MHz Easywave
- 2 x 3 V button cell, CR 2032
- Direction impulse 'Open'/'Stop'/'Close
- Four levels (I to IV) with six coded remote control channels each
- For all operator systems Comfort 400, in combination with the respective Digital receiver

Function/application

- Measurements (WxHxL) 150 x 60 x 22 mm
- Weight Approx. 0,1 kg
- Nominal voltage 3V button cell, CR 2032
- Protection category IP54
- Range of temperature -20C to +60 C
- Operation control 4LEDs
- Coding possibilities >70 millions

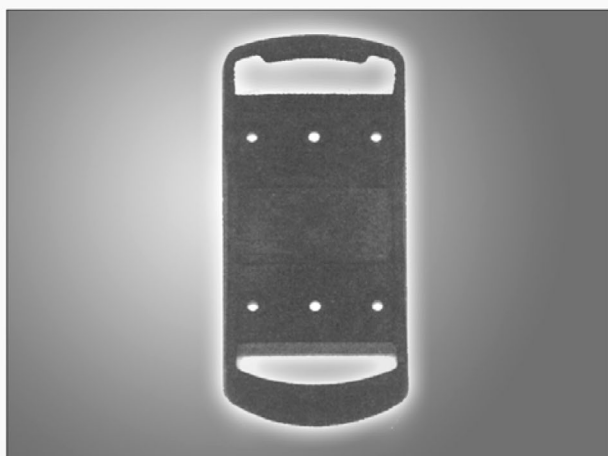

Function/application

- Wall support
- Wall support for multi-channel transmitter Digital 309

Function/application

- Measurements (WxHxL) 70 x 160 x 30 mm



Function/application

- Recess-mounted transmitter, 4 Channel 868 MHz Easywave
- Impulse
- For wireless control of tubular motor
- For cabling to standard buttons and/or switches
- For all Marantec operator systems Comfort 400, in combination with the respective Digital Receiver and external operation buttons / switches
- To save 32 transmitter codes

Function/application

- Measurements (WxHxL) 36 x 30 x 10 mm
- Weight . 0,05 kg
- Nominal voltage 3 V button cell, CR 2032
- Power consumption Approx. 30 mA
- Protection category IP20
- Range of temperature -20C to +60 C




Function/application

- Socket receiver 868 MHz easywave (Plug systems also available for the countries GB, CH, B/F)
- 'On'/'Off'
- To control electric devices inside the house e.g. lamps, fans etc. (all devices that can be switched on and off with max. 10/16A)
- To save 32 transmitter codes

Function/application

- | | |
|------------------------|------------------|
| - Measurements (WxHxL) | 50 x 120 x 75 mm |
| - Weight | . 0,17 kg |
| - Nominal voltage | 230 V AC, 50 HZ |
| - Power consumption | Approx. 30 mA |
| - Protection category | IP20 |
| - Range of temperature | -20C to +60 C |

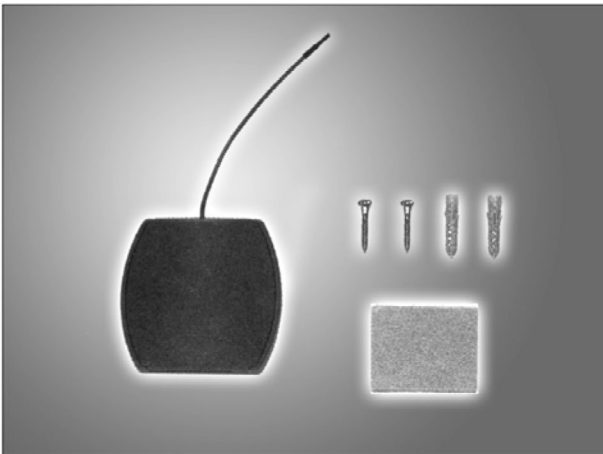


Function/application

- Universal receiver, 2-channel 868 MHz Multibit 433 MHz Multibit
- 'Impulse'/'On'/'Off'/'Permanent operating impulse' The selected function applies for both channels
- Connecting cable for external switch
- For retrofitting all marantec operator systems and systems from other manufacturers and as well for utilization of the two channels traffic control and/or light
- Control mode long-term usage impulse
- Connection possibility for pushbuttons

Function/application

- | | |
|------------------------|------------------|
| - Measurements (WxHxL) | 35 x 63 x 70 mm |
| - Weight | . 0,05 kg |
| - Nominal voltage | DC or AC 12-24 V |
| - Power consumption | Approx. 50 mA |
| - Protection category | IP20 |
| - Range of temperature | -20C to +60 C |
| - Cabling | Conventional |

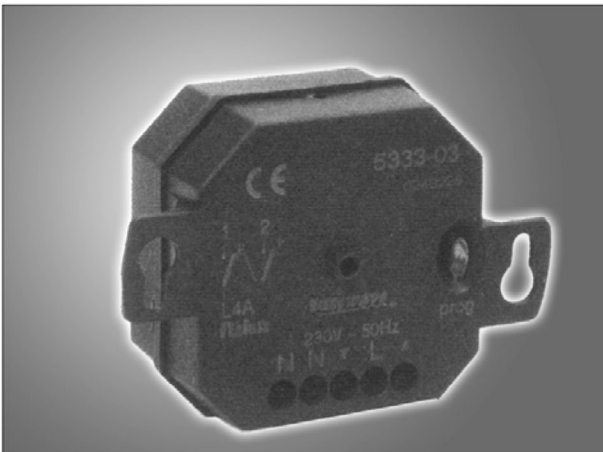

Function/application

- Recess-mounted receiver 2-channel 868 MHz Easywave
- To receive hand transmitter signals
- To control one tubular motor
- To save 32 transmitter codes
- For all operator systems Comfort 400

Function/application

- | | |
|------------------------|-----------------|
| - Measurements (WxHxL) | 46 x 46 x 25 mm |
| - Weight | . 0,05 kg |
| - Nominal voltage | 230 V |
| - Power consumption | Approx. 35 mA |
| - Protection category | IP40 |
| - Range of temperature | -20C to +60 C |
| - Cabling | Conventional |