

AD-SG

ประตูอัตโนมัติ ชนิดบานเลื่อน




FEATURE

- 100% assembly system that does not require welding.
- Automatic dor for high traffic sites. (Frame type, Wall mounted type)
- Silent and smooth operation.
- Large number of accessories available.
- Easy to adjustable opening / closing speed, hold open time and openng width.
- Right / Left open direction. Fast opening speed in the sites.



SPECIFICATIONS

Power Supply :	AC 220V (50~60Hz) SMPS
Controller :	Micro Computer Controll
DC Geared Motor :	DC 24V 3000 RPM Motor (16 : 1)
Drive :	S8M Timing Belt (super clean type)
Maximum Door Weight :	1*160KG
Standard Rail Size :	2000mm
Maximum Clear Width :	1500mm
Minimum Clear Width :	600mm
Opening Width :	(100%) ~ (70%)
Opening Speed :	550mm ~ 900mm / sec
Closing Speed :	400mm ~ 600mm / sec
Hold Open Time :	0~10sec
Ambient Temp. :	-20 ~ +50 C

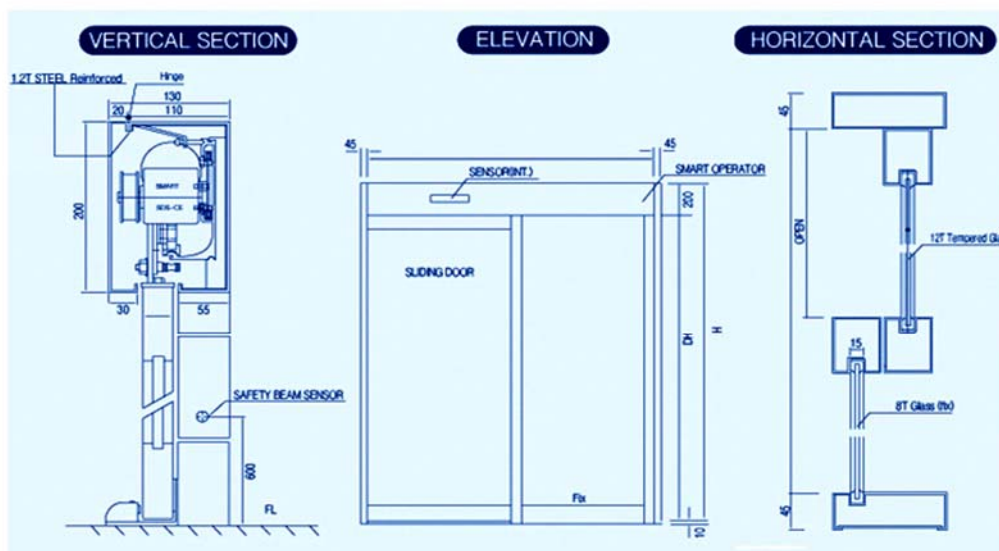

The manufacturer reserves the right to change the specification and technical data of device.
The picture may vary from the real product.