



GPA-367

เครื่องอ่านบัตรระยะไกล 3-50 เมตร

Long Range Card Reader

Product advantage

Adopt high-performance industrial-grade controller.

Tag identification speed 2000 tag/S (time-sharing order transmit)

Tag reading capacity of 1000 tag/S

Tag the buffer capacity of 200 tag (can prevent reread)

Adopt 18 dbi high gain directional antenna


Maximum card read distance of 50 meters

Directional 15:1


With signal attenuator reading distance Adjustable 0-25 meters

read-write space : 2 kbit

Battery low alarm

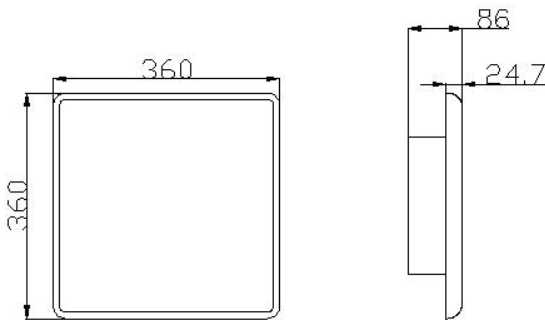

Dimensions

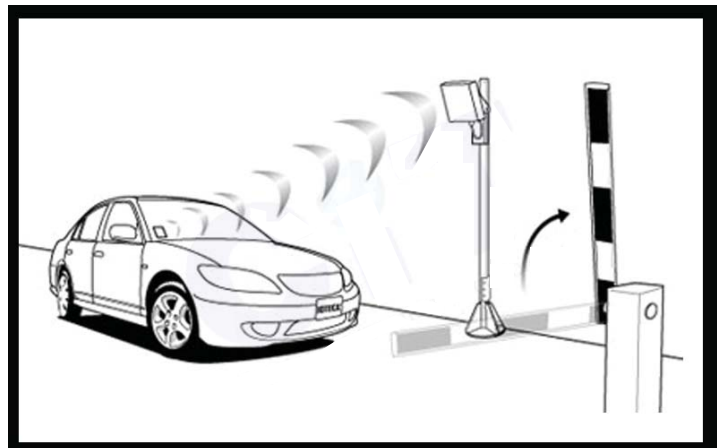

Technical data of card reader

Card reader technology parameters

Process adopt high-performance industrial-grade micro controller

- Tag reading capacity : 1000 tags/S
- Buffer capacity : 200 tags (Can prevent reread)
- voltage : 12 VDC (9-12 VDC)
- Current : 100 ma
- Communication interface : Wiegand 26 bit 34 bit
- RS232 RS485 (factory Settings 115200 8 N 1)
- Working temperature 35 ° C ~ +70 ° C
- Working humidity : 10% ~ 10% RH
- Weight : 2 kg
- Dimensions : 308 x308x60mm



The manufacturer reserves the right to change the specification and technical data of device.
The picture may vary from the real product.