

TR-2420

อุปกรณ์รับ-ส่ง สัญญาณภาพและเสียง(STEREO) ย่านความถี่ 2.4 Ghz



TRANSMITTER

Output level	90dB microvolts/meter @ 3 meters (complies with FCC)
Operating frequency	2.4GHz - 2.4835GHz
Modulation	FM (video and audio)
Video input level	1.0 V p-p
Audio input level	1.0 V p-p
Video input impedance	75 ohm
Audio input impedance	10K
Power Consumption	DC 12V, AC 110V, or AC 230V , 200mA
Unit dimensions	6.9" x 4.4" x 1.8"
Unit weight	13 ounces
Effective operating range	300 feet

RECEIVER



Output level	1.0V p-p±0.3V p-p (video) 1.0Vp-p (audio)
Power consumption	12V DC, 450mA
Unit dimensions	6.9" x 4.4" x 1.8"
Unit weight	15 ounces

IR TRANSMITTER

Output Level	0~-10dBm
Operating Frequency	433.92MHz
Modulation Type	AM
Effective operating range	100 feet

IR RECEIVER

Operating Frequency	433.92MHz
Sensitivity	< -80dBm

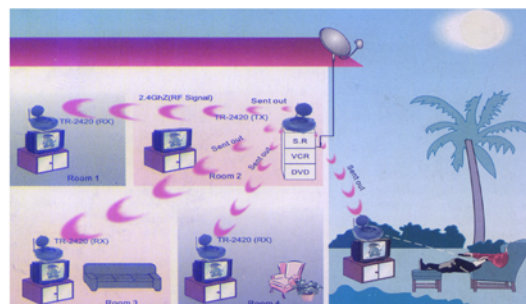

The manufacturer reserves the right to change the specification and technical data of device.
 The picture may vary from the real product.



WWW.GUNKAMOEY.COM