

เซ็นเซอร์ใต้พื้นดิน ขาขา

เซ็นเซอร์ใต้พื้นดิน ขาออก

ใต้พื้นดิน


Specification

- Power requirements: 24 VDC
- Frequency Tuning: Fully automatic
- Inductance Value: 40–2000uH
- Sensitivity: Panels on the Grade 4 scale
- Working Frequency: 2 switches Alternative, Frequency depends mainly on coil geometry, The frequency: 20–200KHz
- Automatic Sensitivity upgrade: Switches alternative
- Pulse relay working mode: Leave pulse/Enter pulse
- Response time: 200ms
- Drift Compensation Rate: Timely compensation
- Working Temperature: -40°C – 80°C



Function

- Channel 1 Loop
- Channel 2 Loop
- Channel 2 Relay, normal open connections
- Channel 2 Relay, common connections
- Power ground wire(220VAC)
- Channel 1 Relay, normal open connections
- Channel 1 Relay, common connections

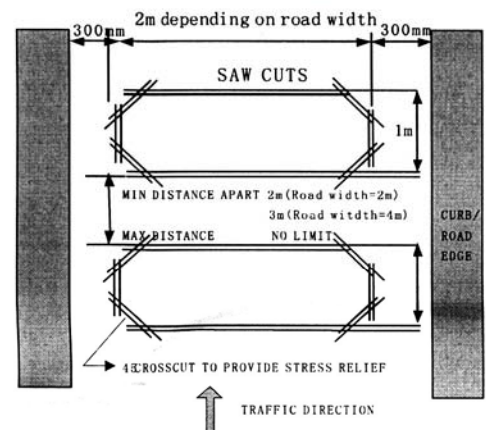

The manufacturer reserves the right to change the specification and technical data of device. The picture may vary from the real product.

