


VRDD-5361 IR


กล้องโดมป้องกันการทำลาย 540 TV Line

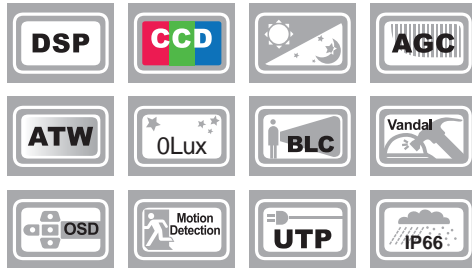

[Features]

- SONY 1/3" Super HAD High Sensitivity Color CCD
- High Resolution : 540TVL (Color), 570TVL (B/W)
- Min. Illumination : 0Lux with IR-LED (18pcs)
- Vari-Focal Auto Iris Lens
- 2.8mm~10mm / F1.2, 3.8mm~9.5mm / F1.2
- True Day & Night for clear image 24 hours
- Private Masking (4 zones)
- Motion Detection
- OSD for user convenience
- Gamma for adjustment can be selected
- Mirror function
- Aluminum & Poly-Carbonated Material Housing (IP66)
- Built-in 3 Axis Bracket

[Dimensions]

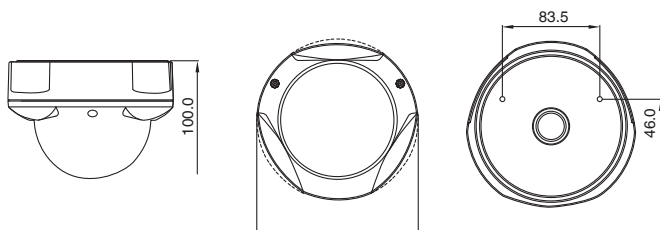

[Specifications]

ITEM	VRDD-5361IR	
Power Consumption	12VDC Only (Max.450mA) 24VAC/12VDC (Max.350mA/550mA)	
Image Sensor	NTSC : 811(H) x 508(V), PAL : 795(H) x 596(V)	
Total Pixels	NTSC : 768(H) x 494(V), PAL : 752(H) x 582(V)	
Effective Pixels	SONY 1/3" Super HAD High Sensitivity Color CCD	
sync	Scanning System	2:1 Interlace
	Synchronization	INT
E L E C T R I C A L	Frequency	NTSC : Horizontal:15.734 KHz Vertical :59.94 Hz PAL : Horizontal: 15.625 KHz Vertical : 50.00 Hz
	Resolution	540TVL (Color), 570TVL (B/W)
	Video Output	NTSC : 1.0Vp-p/75 (Video 0.714Vp-p Sync 0.286Vp-p) PAL : 1.0Vp-p/75 (Video 0.7 Vp-p Sync 0.3 Vp-p)
	S/N (Y signal)	50dB (AGC Off)
	Min. Illumination	0Lux with IR-LED (18pcs)
	Color	COLOR / AUTO / BW
	White Balance	ATW / AWB / FIXED / MANUAL (1, 1000, 500K)
	Shutter Speed	AUTO/MANUAL(1/60, 1/50~1/100,000)
	O.S.D	Built-in
	Motion Detection	ON / OFF (64 Programmable Zones)
	BLC	ON / OFF (64 Programmable Zones)
	Mirror	Built-in (Horizontal Image Inversion)
Privacy Function	ON / OFF (4 Programmable Zones)	
Operating Temperature/Humidity	-10°C ~ +50°C / 30~90% RH	
Weight	1,150g	