


## ADDRESSABLE BUS EXPANSION MODULE

# CA-64 ADR

INTEGRA expansion modules are the very important part of SATEL products portfolio. They can be used to expand the functionality of the panels, and to adjust the system to individual needs. Apart from zones and output expansion, they enable additional features such as e.g. access control.

### FEATURES

- dedicated independent bus for addressable detectors
- support for up to 48 addressable zones
- switching mode power supply

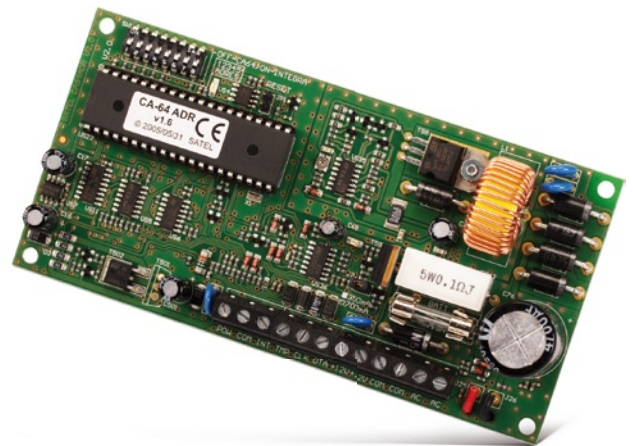

### TECHNICAL SPECIFICATION

Nominal supply voltage ( $\pm 15\%$ )	20 V AC
Power supply type	A
Power supply load capacity	2,2 A
Max battery capacity	7 Ah
Dimensions (mm)	140 x 68
Max number of zones	48
Support for vibration and rollerblind sensors	No
Programmable EOL value	No
Max number of outputs	-
Max current consumption (active relay state)	-
Average current consumption ( $\pm 10\%$ )	46 mA
Environmental class	II
Operating temperature range	-10°C...+55°C