




## VC-6616B

DVR CARD เชื่อมต่อกับคอมพิวเตอร์ 16 Channel

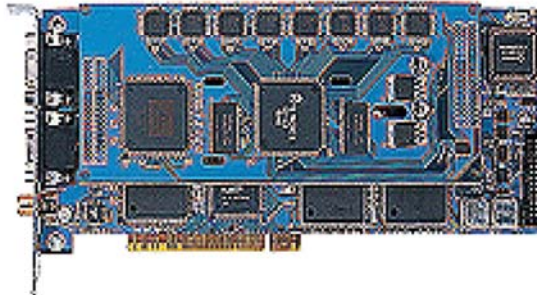

### Features:

- Single card 16CHs video frequency input max.
- Single system ,16channels display 400 frames, as 1 channels for audio input
- 1,4,6,7,9,10,13,16CHs and full screen display;
- High image quality, Digital zoom in/out function ;
- Powerful network function,3 levels quality of net image transfer are adjustable, multi-user access management;
- Triple compression codec, watching live image while in search mode.
- Powerful network function, support the IE viewing of 16CHs simultaneous ;
- Support TV out : A/V Monitor;
- Support WIN2000/NT/XP in English.

### Item Specification:

- Video input 1~16CHs, support 1cards ;
- Compression mode: Modified MJPEG, MPEG4,MPEG4 ;
- Audio input Main board sound-effect cards as a audio channel - WAV;
- Recording 16 Ch Frame speed 400frame (PAL) /480frame (NTSC) ;
- Motion Detection: Multi-zones,Multi-channels ,Pre Alarm ;
- Schedule : Scheduled by time, date and camera; Sequence,Scheduled,Motion,Sensor
- HD occupy 250~300M/h/CH, Data size 3~5KB/Frame recording ;
- Resolution PAL : 320 x 240 ;
- Recording Huge capacity Media HDD, CD-RW, DVD, DAT, ZIP, AVI, print the picture;
- Remote Mode ISDN. DDN. PSTN. LAN. WAN. Internet. ADSL. Modem, etc, with IE reviewing,256K-2M internet band with able to reach the effect of LAN
- Alarm Mode Each card has 16CHs alarm input,(need to match the alarm card);
- Custom programmed and record, such as: time-lapse, Motion Detection, alarm. Own the function of alarm setting and electrical map.
- P/T/Z Control Support several tens of decode protocol, control the PTZ (up, down, left, right, auto), lens(multiple ,focus ,aperture) etc.
- PC requirement – P4 2.4GHz, 512MB RAM,200GB HDD, VGA 128MB,
- Regulation FCC, CE

